



AVORA DOORS



ENERGY

SMART

NEO

WINDOWS



Up to 5
anti-burglary catch pawls
in each sash

CONTACT US:


-  Phone:
+1 512-522-2284
-  Email:
info@avoradoors.com
-  Website:
www.AvoraDoors.com
-  Address:
Texas Facility 1309 Ave H Grand
Prairie, TX 75050



AVORA DOORS

NEO

Strong angles and minimalist architecture, yet with the visual lightness of the structure. The simple, symmetrical, cubist shape is the hallmark of the NEO system. The system meets the highest standards for energy efficiency and the latest design trends. It is available in version 2.0 with two gaskets and 3.0 with three gaskets.

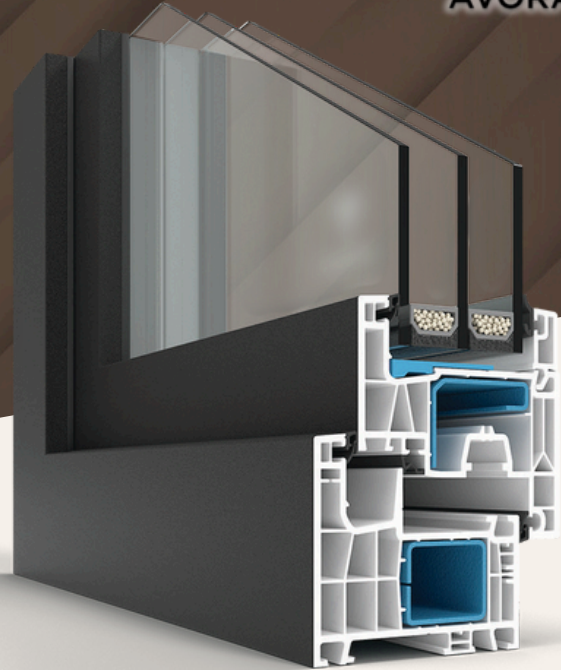

BENEFITS

of choosing NEO system



modern design



perfect insulation



aluminum cover available

DISTINCTIVE FEATURES

- Glazing width in non-rebate leaves up to 2", and in semi-rebate leaves up to 2 1/3".
- Possibility of concealed drainage.
- Excellent thermal insulation properties.
- Six-chamber system with central gasket (3 seals in NEO 3.0) for enhanced burglary protection.
- Superb acoustic insulation.
- Available in numerous color variations and with aluskin® aluminum overlays.



NEO
TILT&TURN

ENERGY PERFORMANCE RATINGS

U-factor
0.17 - 0.27

Solar Heat Gain Coefficient
0.20-0.34

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance
0.23-0.51

Condensation Resistance
60-76

design pressure (DP)
+45,11 psf

structural pressure (STP)
+67,67psf